




**VITI AUTOFILETTANTI
 SELF TAPPING SCREWS**

C15 CEMENTATE - CARBON STEEL C15 HARDENED
 TESTA SVASATA CALOTTA-RAISED COUNTERSUNK HEAD
 IMPRONTA PHILLIPS-POZI CROSS RECESS
 CON PUNTA - WITH POINT

COD 11805

DIN 7983-C
 UNI 6956 AB
 ISO 7051

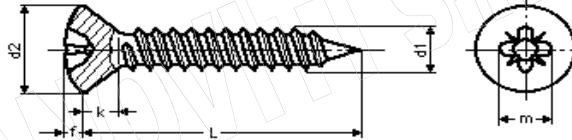

| | | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 |
|----|-----|------|------|------|------|------|------|-------|-------|
| d1 | min | 2,10 | 2,79 | 3,43 | 3,78 | 4,09 | 4,65 | 5,31 | 6,10 |
| | max | 2,24 | 2,90 | 3,53 | 3,91 | 4,22 | 4,80 | 5,46 | 6,25 |
| d2 | min | 4,00 | 5,20 | 6,44 | 7,14 | 7,74 | 9,14 | 10,37 | 11,97 |
| | max | 4,30 | 5,50 | 6,80 | 7,50 | 8,10 | 9,50 | 10,80 | 12,40 |
| K | | 1,30 | 1,70 | 2,10 | 2,30 | 2,50 | 3,00 | 3,40 | 3,80 |
| PZ | | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |

| Lunghezza / Lenght mm. | Diametro / Diameter mm. (°) | | | | | | | | |
|---------------------------|-----------------------------|-----|-----|-----|-----|-----|-----|-----|--|
| | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 | |
| 4,5 | | | | | | | | | |
| 6,5 | | | | | | | | | |
| 9,5 | | | | | | | | | |
| 13 | | | | | | | | | |
| 16 | | | | | | | | | |
| 19 | | | | | | | | | |
| 22 | | | | | | | | | |
| 25 | | | | | | | | | |
| 32 | | | | | | | | | |
| 38 | | | | | | | | | |
| 45 | | | | | | | | | |
| 50 | | | | | | | | | |
| 60 | | | | | | | | | |
| 70 / 60 | | | | | | | | | |
| 80 / 60 | | | | | | | | | |
| 90 / 60 | | | | | | | | | |
| 100 / 60 | | | | | | | | | |
| 110 / 60 | | | | | | | | | |

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND



MILANOVITI s.r.l.


FABBRICA VITERIE

VITI AUTOFILETTANTI SELF TAPPING SCREWS

INOX A4 - STAINLESS STEEL A4
TESTA SVASATA CALOTTA-RAISED COUNTERSUNK HEAD
IMPRONTA PHILLIPS-POZI CROSS RECESS
CON PUNTA - WITH POINT

COD 14003

DIN 7983-C
UNI 6956 AB
ISO 7051

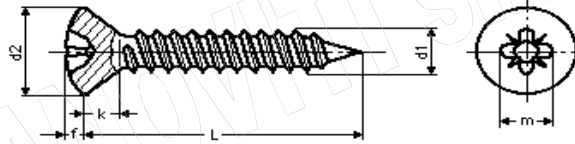

| | | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 |
|----|-----|------|------|------|------|------|------|-------|-------|
| d1 | min | 2,10 | 2,79 | 3,43 | 3,78 | 4,09 | 4,65 | 5,31 | 6,10 |
| | max | 2,24 | 2,90 | 3,53 | 3,91 | 4,22 | 4,80 | 5,46 | 6,25 |
| d2 | min | 4,00 | 5,20 | 6,44 | 7,14 | 7,74 | 9,14 | 10,37 | 11,97 |
| | max | 4,30 | 5,50 | 6,80 | 7,50 | 8,10 | 9,50 | 10,80 | 12,40 |
| k | | 1,30 | 1,70 | 2,10 | 2,30 | 2,50 | 3,00 | 3,40 | 3,80 |
| PZ | | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |

| Lunghezza / Length mm. | Diametro / Diameter mm. (*) | | | | | | | |
|---------------------------|-----------------------------|-----|-----|-----|-----|-----|-----|-----|
| | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 |
| 4,5 | | | | | | | | |
| 6,5 | | | | | | | | |
| 9,5 | | | | | | | | |
| 13 | | | | | | | | |
| 16 | | | | | | | | |
| 19 | | | | | | | | |
| 22 | | | | | | | | |
| 25 | | | | | | | | |
| 32 | | | | | | | | |
| 38 | | | | | | | | |
| 45 | | | | | | | | |
| 50 | | | | | | | | |
| 60 | | | | | | | | |
| 70 | | | | | | | | |
| 80 | | | | | | | | |
| 90 | | | | | | | | |
| 100 | | | | | | | | |
| 110 | | | | | | | | |

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND