




**VITI AUTOFILETTANTI
SELF TAPPING SCREWS**

C15 CEMENTATE - CARBON STEEL C15 HARDENED
TESTA CILINDRICA - PAN HEAD
IMPRONTA CROCE POZI - CROSS RECESS POZI
CON PUNTA - WITH POINT

COD 118114

UNI 6954
DIN 7981 - C
ISO 7049

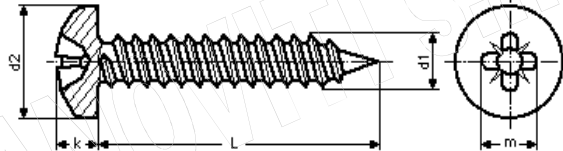

		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
d1	min	2,10	2,76	3,35	3,73	4,04	4,62	5,28	6,03
	max	2,24	2,90	3,53	3,91	4,22	4,80	5,46	6,25
d2	min	3,90	5,30	6,54	7,14	7,84	9,14	10,37	12,07
	max	4,20	5,60	6,90	7,50	8,20	9,50	10,80	12,50
k	min	1,55	1,95	2,35	2,55	2,75	3,25	3,65	4,25
	max	1,80	2,20	2,60	2,80	3,05	3,55	3,95	4,55
ph		1	1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
4,5								
6,5								
8								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
57								
63								
70								
75								
80								
100								

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND



MILANOVITI s.r.l.


FABBRICA VITERIE

VITI AUTOFILETTANTI SELF TAPPING SCREWS

INOX A2 - STAINLESS STEEL A2
TESTA CILINDRICA - PAN HEAD
IMPRONTA CROCE POZI - CROSS RECESS POZI
CON PUNTA - WITH POINT

COD 12007

UNI 6954
DIN 7981 - C
ISO 7049

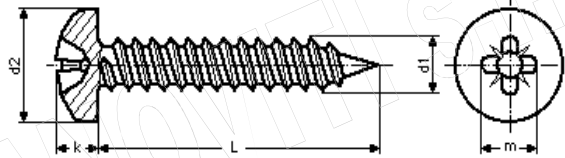

		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
d1	min	2,10	2,76	3,35	3,73	4,04	4,62	5,28	6,03
	max	2,24	2,90	3,53	3,91	4,22	4,80	5,46	6,25
d2	min	3,90	5,30	6,54	7,14	7,84	9,14	10,37	12,07
	max	4,20	5,60	6,90	7,50	8,20	9,50	10,80	12,50
k	min	1,55	1,95	2,35	2,55	2,75	3,25	3,65	4,25
	max	1,80	2,20	2,60	2,80	3,05	3,55	3,95	4,55
ph		1	1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
4,5								
6,5								
8								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
57								
63								
70								
75								
80								
100								

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND



MILANOVITI s.r.l.


FABBRICA VITERIE

VITI AUTOFILETTANTI SELF TAPPING SCREWS

INOX A4 - STAINLESS STEEL A4
TESTA CILINDRICA - PAN HEAD
IMPRONTA CROCE POZI - CROSS RECESS POZI
CON PUNTA - WITH POINT

COD 14001

UNI 6954
DIN 7981 - C
ISO 7049

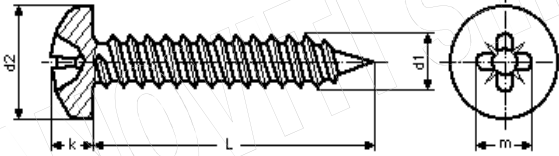

		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
d1	min	2,10	2,76	3,35	3,73	4,04	4,62	5,28	6,03
	max	2,24	2,90	3,53	3,91	4,22	4,80	5,46	6,25
d2	min	3,90	5,30	6,54	7,14	7,84	9,14	10,37	12,07
	max	4,20	5,60	6,90	7,50	8,20	9,50	10,80	12,50
k	min	1,55	1,95	2,35	2,55	2,75	3,25	3,65	4,25
	max	1,80	2,20	2,60	2,80	3,05	3,55	3,95	4,55
ph		1	1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
4,5								
6,5								
8								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
60								
70								
80								
90								
100								
110								

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND