




VITI AUTOFILETTANTI SELF TAPPING SCREWS

C15 CEMENTATE - CARBON STEEL C15 HARDENED
TESTA SVASATA - COUNTERSUNK HEAD
IMPRONTA CROCE PHILLIPS - PHILLIPS CROSS RECESS
SENZA PUNTA - WITHOUT POINT

COD 11820

UNI 6955 - B
DIN 7982 - F
ISO 7050

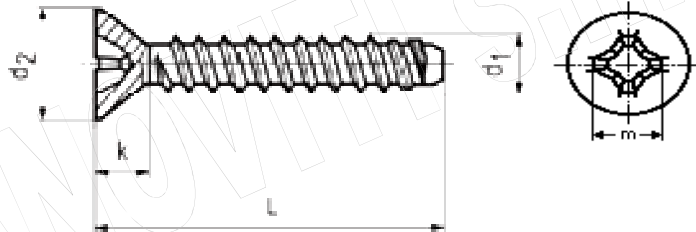

| | | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 |
|----|-----|------|------|------|------|------|------|-------|-------|
| d1 | min | 2,10 | 2,79 | 3,43 | 3,78 | 4,09 | 4,65 | 5,31 | 6,10 |
| | max | 2,24 | 2,90 | 3,53 | 3,91 | 4,22 | 4,80 | 5,46 | 6,25 |
| d2 | min | 4,05 | 5,20 | 6,44 | 7,14 | 7,74 | 9,14 | 10,37 | 11,97 |
| | max | 4,30 | 5,50 | 6,80 | 7,50 | 8,10 | 9,50 | 10,80 | 12,40 |
| k | = | 1,30 | 1,70 | 2,10 | 2,30 | 2,50 | 3,00 | 3,40 | 3,80 |
| ph | | 1 | 2 | 2 | 2 | 2 | 2 | 3 | 3 |

| Lunghezza / Length mm. | Diametro / Diameter mm. (*) | | | | | | | |
|---------------------------|-----------------------------|-----|-----|-----|-----|-----|-----|-----|
| | 2,2 | 2,9 | 3,5 | 3,9 | 4,2 | 4,8 | 5,5 | 6,3 |
| 4,5 | | | | | | | | |
| 6,5 | | | | | | | | |
| 9,5 | | | | | | | | |
| 13 | | | | | | | | |
| 16 | | | | | | | | |
| 19 | | | | | | | | |
| 22 | | | | | | | | |
| 25 | | | | | | | | |
| 32 | | | | | | | | |
| 38 | | | | | | | | |
| 45 | | | | | | | | |
| 50 | | | | | | | | |
| 60 | | | | | | | | |
| 70 / 60 | | | | | | | | |
| 80 / 60 | | | | | | | | |
| 90 / 60 | | | | | | | | |
| 100 / 60 | | | | | | | | |
| 110 / 60 | | | | | | | | |
| 120 / 60 | | | | | | | | |

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND