




VITI TRUCIOLARI SUPERSVASANTI CHIPBOARD SCREWS

C15 CEMENTATE - CARBON STEEL C15 HARDENED
TESTA SVASATA – COUNTERSUNK HEAD
IMPRONTA 6 LOBI – 6 LOBES RECESS
CON INSERTO AUTOPERFORANTE - WITH SERRATION

COD 21224

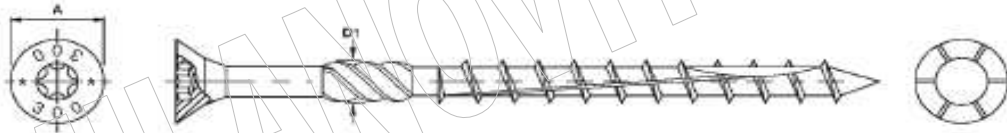

		4,0	4,5	5,0	6,0	8,0	10,0
A	min	7,50	8,50	9,64	11,50	14,30	17,40
	max	8,00	9,00	10,00	12,10	15,00	18,20
D1	min	3,50	3,70	3,70	4,80	6,80	8,00
	max	3,80	4,00	4,40	5,20	7,20	8,50
TX		T20	T25	T25	T30	T40	T40


Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)					
	4,0	4,5	5,0	6,0	8,0	10,0
30 / 18						
35 / 20						
40 / 24						
45 / 27						
50 / 30						
60 / 35						
70 / 42						
80 / 50						
90 / 50						
100 / 50						
120 / 70						
120 / 80						
140 / 70						
140 / 80						
160 / 70						
160 / 80						
180 / 70						
180 / 80						
200 / 70						
200 / 80						
220 / 70						
220 / 80						
240 / 70						



VITI TRUCIOLARI SUPERSVASANTI CHIPBOARD SCREWS

C15 CEMENTATE - CARBON STEEL C15 HARDENED
 TESTA SVASATA – COUNTERSUNK HEAD
 IMPRONTA 6 LOBI – 6 LOBES RECESS
 CON INSERTO AUTOPERFORANTE - WITH SERRATION

COD 21224

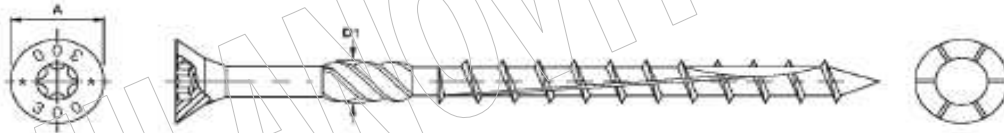

		4,0	4,5	5,0	6,0	8,0	10,0
A	min	7,50	8,50	9,64	11,50	14,30	17,40
	max	8,00	9,00	10,00	12,10	15,00	18,20
D1	min	3,50	3,70	3,70	4,80	6,80	8,00
	max	3,80	4,00	4,40	5,20	7,20	8,50
TX		T20	T25	T25	T30	T40	T40

240 / 80							
260 / 70							
260 / 80							
280 / 70							
280 / 80							
300 / 70							
300 / 80							
320 / 80							
340 / 80							
360 / 80							
380 / 80							
400 / 80							

 PRODUZIONE STANDARD